

PCT

WORLD INTELLECTUAL PROPERTY ORGANIZATION
International Bureau



INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁷ : B05C 3/09, 9/12, B05D 7/22, 1/18, A61F 2/06		(11) International Publication Number: WO 00/04999
A1		(43) International Publication Date: 3 February 2000 (03.02.00)
(21) International Application Number: PCT/GB99/02370		(81) Designated States: AE, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, DE, DK, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, UA, UG, US, UZ, VN, YU, ZA, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SL, SZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).
(22) International Filing Date: 21 July 1999 (21.07.99)		
(30) Priority Data: 98305788.6 21 July 1998 (21.07.98) EP		
(71) Applicant (for all designated States except US): BIOCOMPATIBLES LIMITED [GB/GB]; Frensham House, Farnham Business Park, Weydon Lane, Farnham, Surrey GU9 8QL (GB).		
(72) Inventors; and (75) Inventors/Applicants (for US only): TAYLOR, Alistair, Stewart [GB/GB]; Biocompatibles Limited, Frensham House, Farnham Business Park, Weydon Lane, Farnham, Surrey GU9 8QL (GB). TOLLHURST, Lee, Alan [GB/GB]; Biocompatibles Limited, Frensham House, Farnham Business Park, Weydon Lane, Farnham, Surrey GU9 8QL (GB). HEMPENSTALL, Donal, Thomas [GB/GB]; 72 Braybourne Close, Uxbridge UB8 1UJ (GB).		
(74) Agent: GILL JENNINGS & EVERY; Broadgate House, 7 Eldon Street, London EC2M 7LH (GB).		


Published

With international search report.
Before the expiration of the time limit for amending the claims and to be republished in the event of the receipt of amendments.

(54) Title: COATING

(57) Abstract

An apparatus for coating tubular members (3), such as stents comprises a liquid reservoir (2) and a stent support member for supporting, in use, a tubular member. Support member dipping means (5, 8) places the support member in the liquid reservoir in use and draws the support member therefrom. Pressure differential generating means (6) generates a pressure differential. The stent support member is arranged to provide a central passageway through a stent placed thereon, the central passageway having a plurality of perforations formed therein, and the pressure differential generating means is arranged to generate, in use, a pressure differential between the passageway and the tubular member.

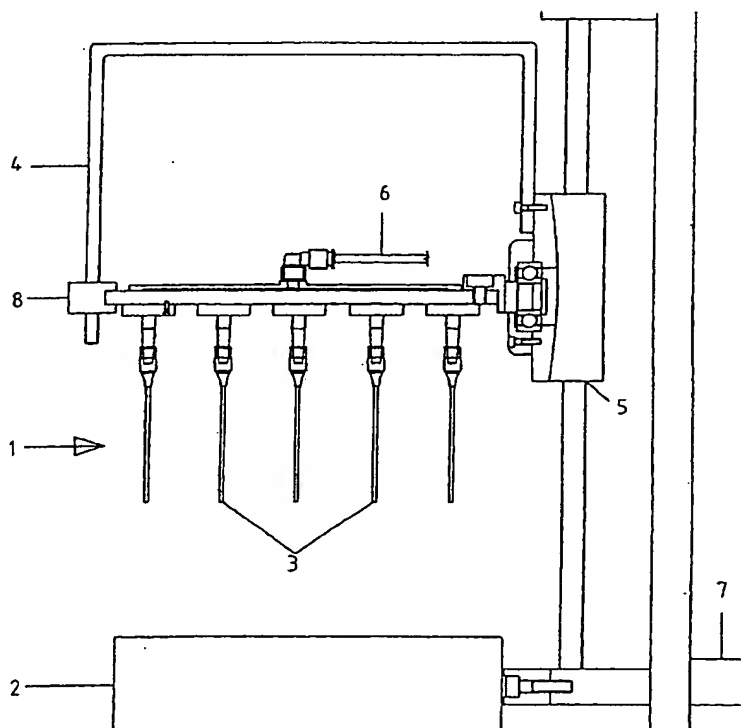

BEST AVAILABLE COPY

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece			TR	Turkey
BG	Bulgaria	HU	Hungary	ML	Mali	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MN	Mongolia	UA	Ukraine
BR	Brazil	IL	Israel	MR	Mauritania	UG	Uganda
BY	Belarus	IS	Iceland	MW	Malawi	US	United States of America
CA	Canada	IT	Italy	MX	Mexico	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NE	Niger	VN	Viet Nam
CG	Congo	KE	Kenya	NL	Netherlands	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NO	Norway	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	NZ	New Zealand		
CM	Cameroon			PL	Poland		
CN	China	KR	Republic of Korea	PT	Portugal		
CU	Cuba	KZ	Kazakhstan	RO	Romania		
CZ	Czech Republic	LC	Saint Lucia	RU	Russian Federation		
DE	Germany	LI	Liechtenstein	SD	Sudan		
DK	Denmark	LK	Sri Lanka	SE	Sweden		
EE	Estonia	LR	Liberia	SG	Singapore		

COATING

This invention relates to the coating of tubular members, such as stents.

5 During the manufacture of stents it is often necessary to coat a stent with a liquid. The liquid may be a biocompatible material or a coating which encases the stent with a material once the liquid has dried. Such coating has often been performed by manually dipping the stent in
10 the liquid and then removing the stent and drying it. Such a process leads to manufacturing inconsistency. Furthermore, many stents have plural apertures formed in the surface thereof and the presence of excess liquid or inconsistent drying of the liquid can lead to such
15 apertures becoming blocked unnecessarily.

The present invention seeks to overcome the above and other problems.

According to the present invention there is provided an apparatus for coating tubular members, such as stents,
20 the apparatus comprising:

a liquid reservoir;

a stent support member for supporting, in use, a tubular member;

support member dipping means for placing the support
25 member in the liquid reservoir in use and drawing the support member therefrom; and

pressure differential generating means for generating a pressure differential, wherein:

the stent support member is arranged to provide a
30 central passageway through a stent placed thereon, the central passageway having a plurality of perforations formed therein, and

the pressure differential generating means is arranged to generate, in use, a pressure differential between the
35 passageway and the tubular member.

The support member may be formed from a rigid hollow member, such as a needle, with apertures formed therein.

The support member may alternatively be formed from a rigid member having a series of slots formed therein. With such an arrangement a sheath may be placed around the external periphery of the member to define a series of circular perforations. The support member may be formed from metal, 5 a plastics material, or a combination thereof.

The pressure differential generating means may be a pump. The support member may have two collars and a central rigid support member, the collars arranged to 10 engage with each end of a tubular member in use.

The dipping means may be arranged to enable inversion of the support member once it has been removed from the liquid reservoir.

The apparatus may further comprise a drying chamber 15 into which a heated gas can be pumped to dry the tubular member on the support member after removal from the liquid reservoir.

Plural support members may be provided in the apparatus. Each support member may support plural stents.

20 A corresponding method is also provided.

The apparatus and method of the present invention provides a system which produces consistent coating results. Furthermore, because the pressure differential that is generated can prevent apertures becoming blocked 25 with dried solution, stents with apertures that are produced by the apparatus and method are less likely to be rejected because of such blockages. In addition the apparatus and method can produce a thin coating (for example in the region 5nm to 200nm) on the inside of the 30 stent whilst producing a thicker coating (for example 500nm to 1500nm) on the outside.

One example of the present invention will now be described with reference to the accompanying drawings, in which:

35 Figure 1 is a side view of an apparatus according to the present invention;

Figure 2 is a side view of a first example support member for use in the apparatus of figure 1;

Figure 3 is a side cross-sectional view of a second example support member for use in the apparatus of figure 1; and

Figure 4 is a graph of coating depth versus withdraw speed for the outer surface of an exemplary stent;

Figure 5 is a graph of coating depth versus withdraw speed for the inner surface of an exemplary stent;

Figure 6 is a graph of coating depth versus pressure differential from the outer surface of an exemplary stent; and

Figure 7 is a graph of coating depth versus pressure differential for the inner surface of an exemplary stent.

Referring to figure 1, an apparatus 1 according to the present invention has a liquid reservoir 2 which, in use, holds a coating solution. Plural support members 3 are arranged in the form of an array on a frame 4 which is slidably supported on a support pillar 5. The frame 4 can be driven up and down on a support pillar 5 by a servo motor and drive mechanism (not shown).

Each of the support members 3 is formed from a hollow tube, with the interior of each tube being connected to a conduit 6 which, in turn, is connected to a vacuum pump 7.

The frame 4 supporting the support members 3 is arranged so that it can be rotated around a central axis 8 under the control of an operator or servo motor (not shown). Rotation of the frame 4 allows rotation of the support members 3 from a position in which they are directed generally downwards to a position in which they are directed generally upwards.

The apparatus 1 is operated by placing the stent on each support member 3 and retaining the stent thereon. The stent may be retained by the provision of one or more collars (not shown) attached to each support member 3, the collars arranged to prevent the stent moving to any significant degree along the axis of the support member

during the coating process. The frame is then rotated so that the unattached end of each of the support members 3 is pointing downward. Once this has been done the frame 4 is lowered into the liquid reservoir 2 and then drawn up from the liquid reservoir 2 at a rate which ensures even coating. The rate will generally be determined by the dimensions of the stents being coated and the viscosity of the liquid contained within the liquid reservoir 2.

Once the frame 4 and support members have been removed from liquid in the liquid reservoir 2 the frame 4 is rotated through 180° so that each of the support members is pointing in a generally upward direction. A pressure differential is then created by the vacuum pump 7 so that air is drawn through apertures 9 in each of the support members via conduit 6 to the vacuum pump 7. The airflow generated by the pressure differential ensures that liquid is not retained in any of the apertures of the stents. The pressure differential may be generated whilst the frame 4, support members 3 and stents are contained within a drying chamber (not shown).

Figures 2 and 3 show example support members 3 which can be employed in the apparatus 1 of figure 1.

The support member 3 of figure 2 is formed from a hollow tube with a sealed end 10, the member 3 being formed from stainless steel or any other sufficiently rigid material. Formed on the surface of the member 3 are a series of apertures 11, which allow passage of air from the exterior of the member 3 through to its hollow interior. The support member 3 may be attached by a quick release mechanism to the apparatus 1.

Figure 3 shows an alternative support member 3 in which the support member 3 is formed from a rigid hollow tube having one or more slots 12 formed in a surface and parallel to its axis. A sheath 13, formed from a plastics material, ceramic, or other appropriate material is placed around the external periphery of the support member 3. The sheath 13 has a plurality of apertures 14, or may have one

or more spiral slots formed around its outer surface. This arrangement also defines apertures through which air can be drawn in use.

Referring to Figures 4 to 7, it can be seen that the speed of withdraw of the stent and support member 3 from liquid reservoir 2 can control both the outer and inner coating depth so that an optimum coating depth can be provided. Furthermore, by appropriate control of the value of the pressure differential generated by the vacuum pump 7, further control of inner and outer coating depths can be provided. Control of withdraw speed and pressure differential may be effected by provision of apparatus control means (not shown) which can be configured easily by an operator dependent upon the type of tubular member that is being coated.

CLAIMS

1. An apparatus for coating tubular members, such as stents, the apparatus comprising:
- 5 a liquid reservoir;
a stent support member for supporting, in use, a tubular member;
support member dipping means for placing the support member in the liquid reservoir in use and drawing the support member therefrom; and
- 10 pressure differential generating means for generating a pressure differential, wherein:
the stent support member is arranged to provide a central passageway through a stent placed thereon, the central passageway having a plurality of perforations formed therein, and
- 15 the pressure differential generating means is arranged to generate, in use, a pressure differential between the passageway and the tubular member.
- 20
2. An apparatus according to claim 1, wherein the support member is formed from a rigid hollow member with apertures formed therein.
- 25
3. An apparatus according to claim 1, wherein the support member is formed from a rigid member having a series of slots formed therein.
- 30
4. An apparatus according to claim 3, wherein a sheath is placed around the external periphery of the member to define a series of apertures.
- 35
5. An apparatus according to any preceding claim, wherein the support member is formed from metal, a plastics material or a ceramic.

6. An apparatus according to any preceding claim, wherein the pressure differential generating means is a pump.
7. An apparatus according to any preceding claim, wherein
5 the support member may have two collars and a central rigid support member, the collars arranged to engage with each end of a tubular member in use.
8. An apparatus according to any preceding claim, wherein
10 the dipping means is arranged to enable inversion of the support member once it has been removed from the liquid reservoir.
9. An apparatus according to any preceding claim, further
15 comprising a drying chamber into which a heated gas can be pumped to dry the tubular member on the support member after removal from the liquid reservoir.
10. An apparatus according to any preceding claim, wherein
20 plural support members are provided in the apparatus.
11. A method for coating tubular members, such as stents, the method comprising the steps of:
providing liquid in a liquid reservoir;
25 supporting a tubular member;
placing the support member in the liquid reservoir and drawing the support member therefrom; and
generating a pressure differential, wherein:
the pressure differential is generated between the
30 passageway and the tubular member.
12. The method of claim 11, further comprising the step of drying the member in heated gas.
- 35 13. The method of claim 11 or claim 12, further comprising the step of inverting the tubular member prior to generating the pressure differential.

14. The method of claim 11, 12 or 13, wherein the rate at which the support member is drawn and the pressure differential is controlled to produce a coating that is thinner on the inside surface of the tubular member than it is on the outside.
- 5

1/6

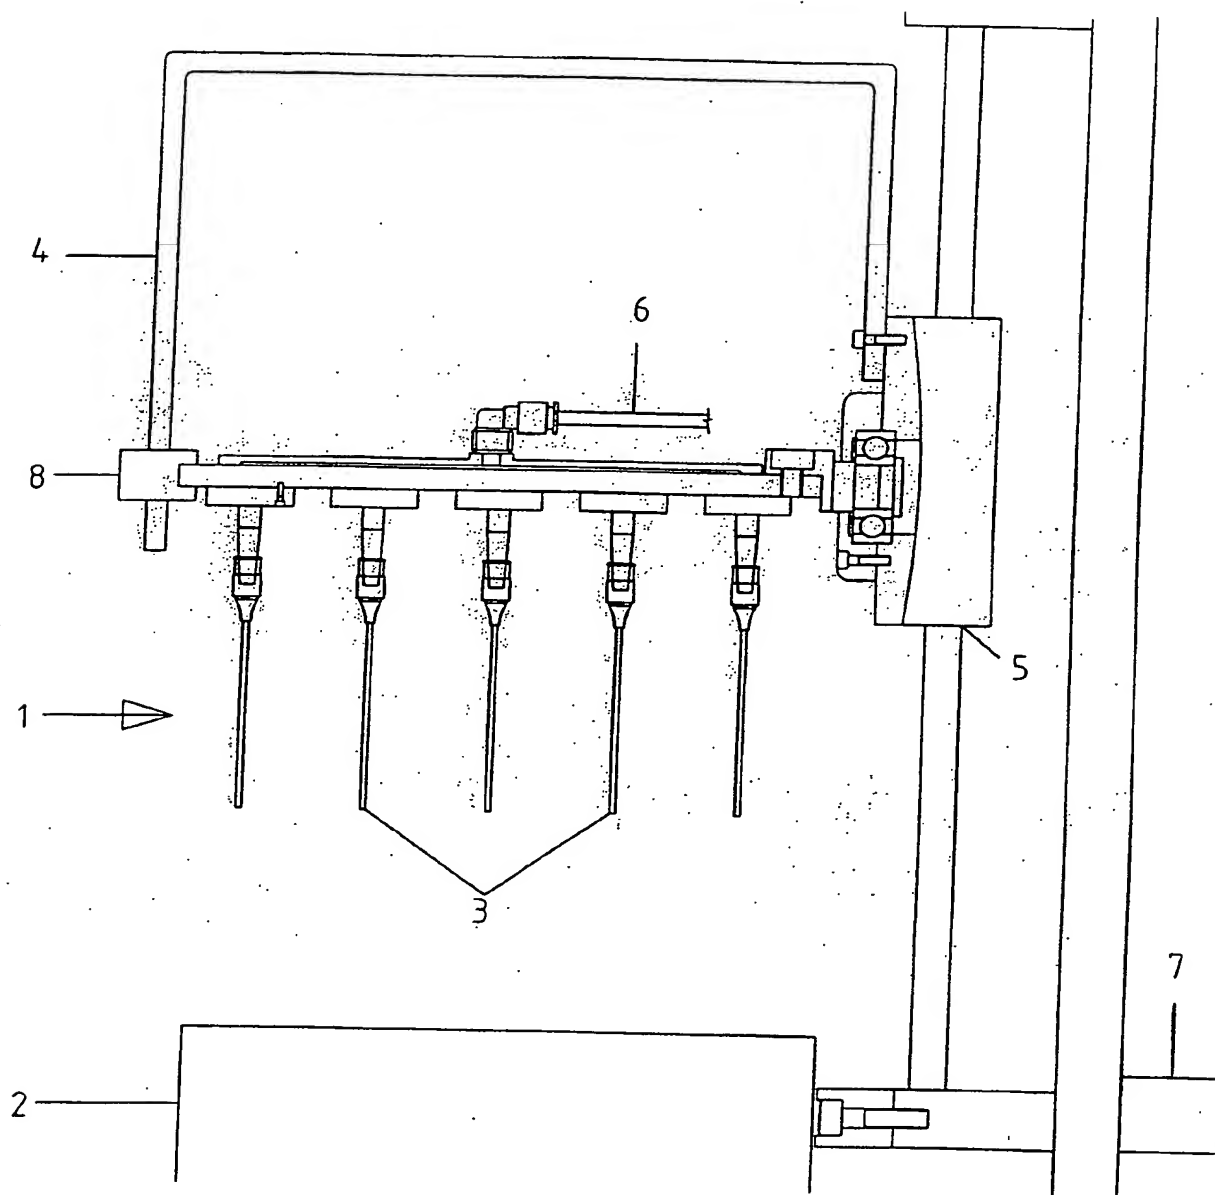


Fig 1

Fig 2



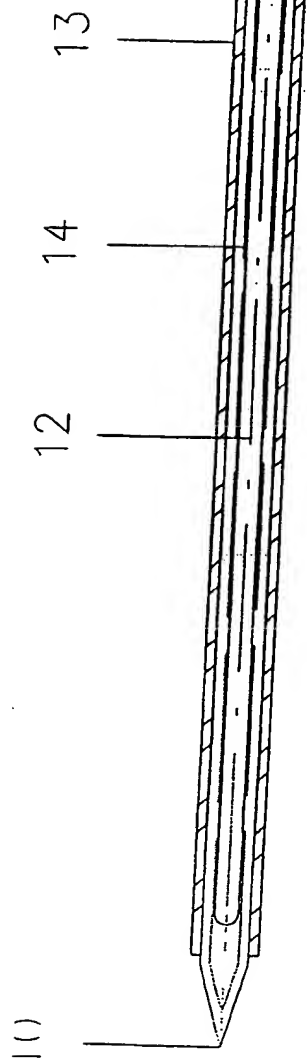



Fig 3

Figure 4

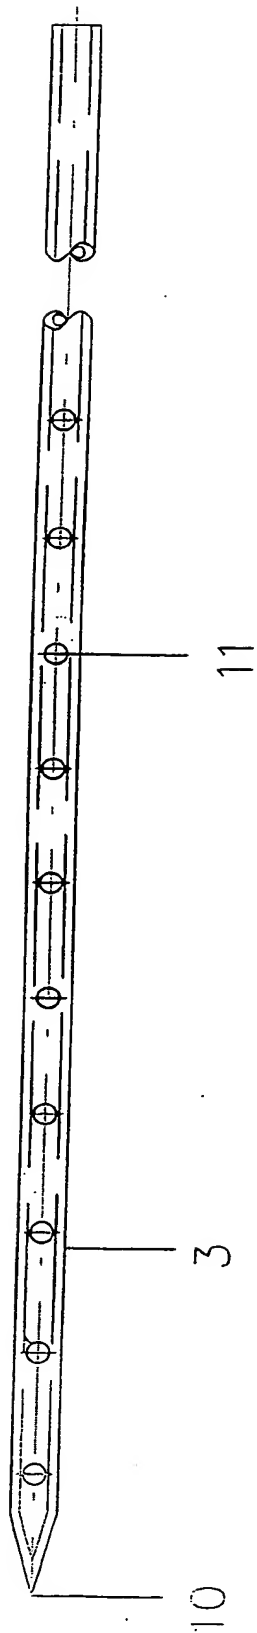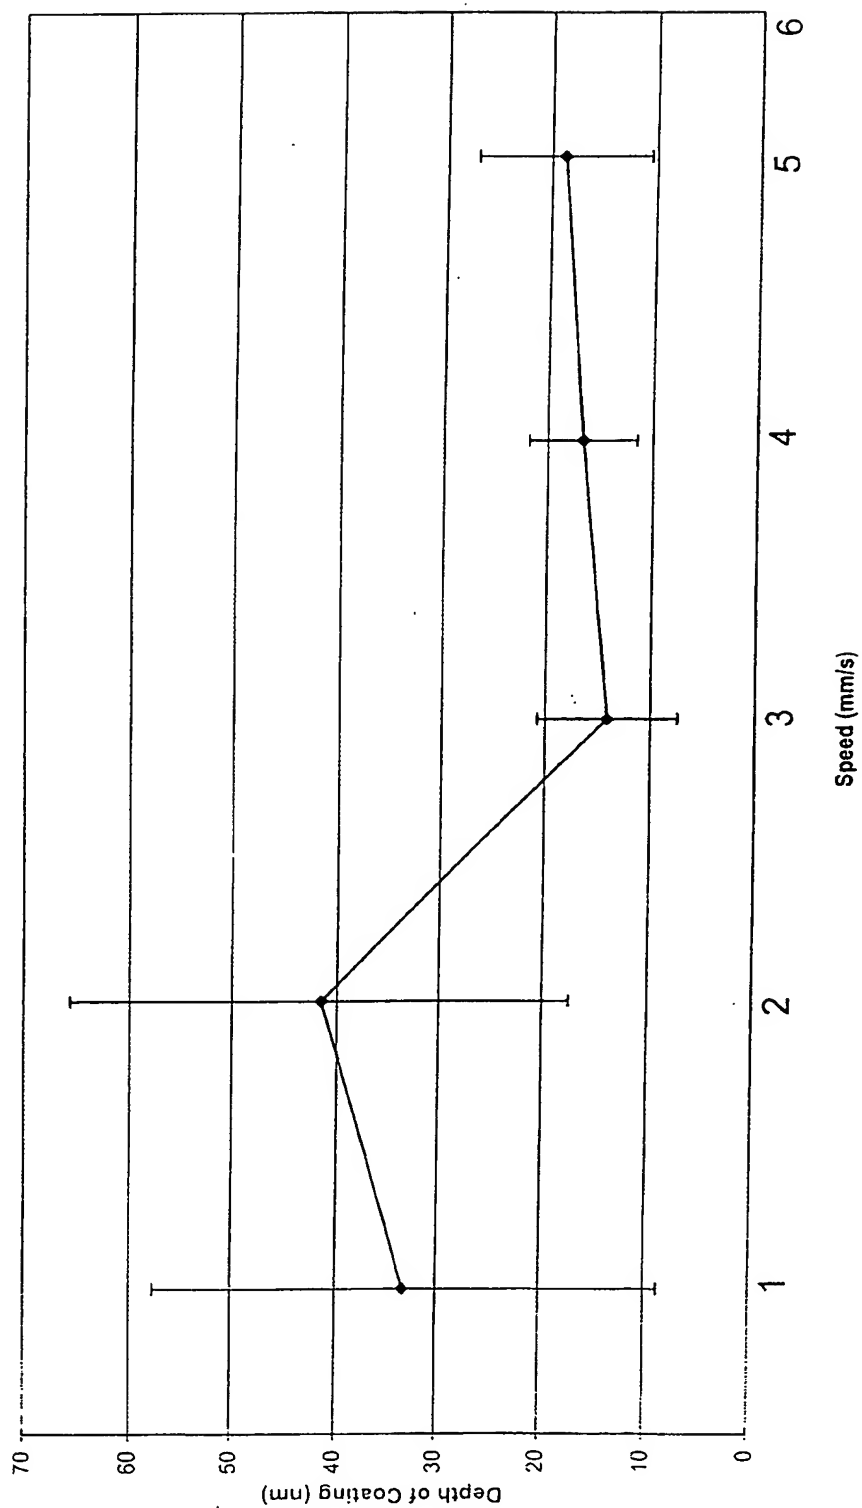

4/6

Figure 5

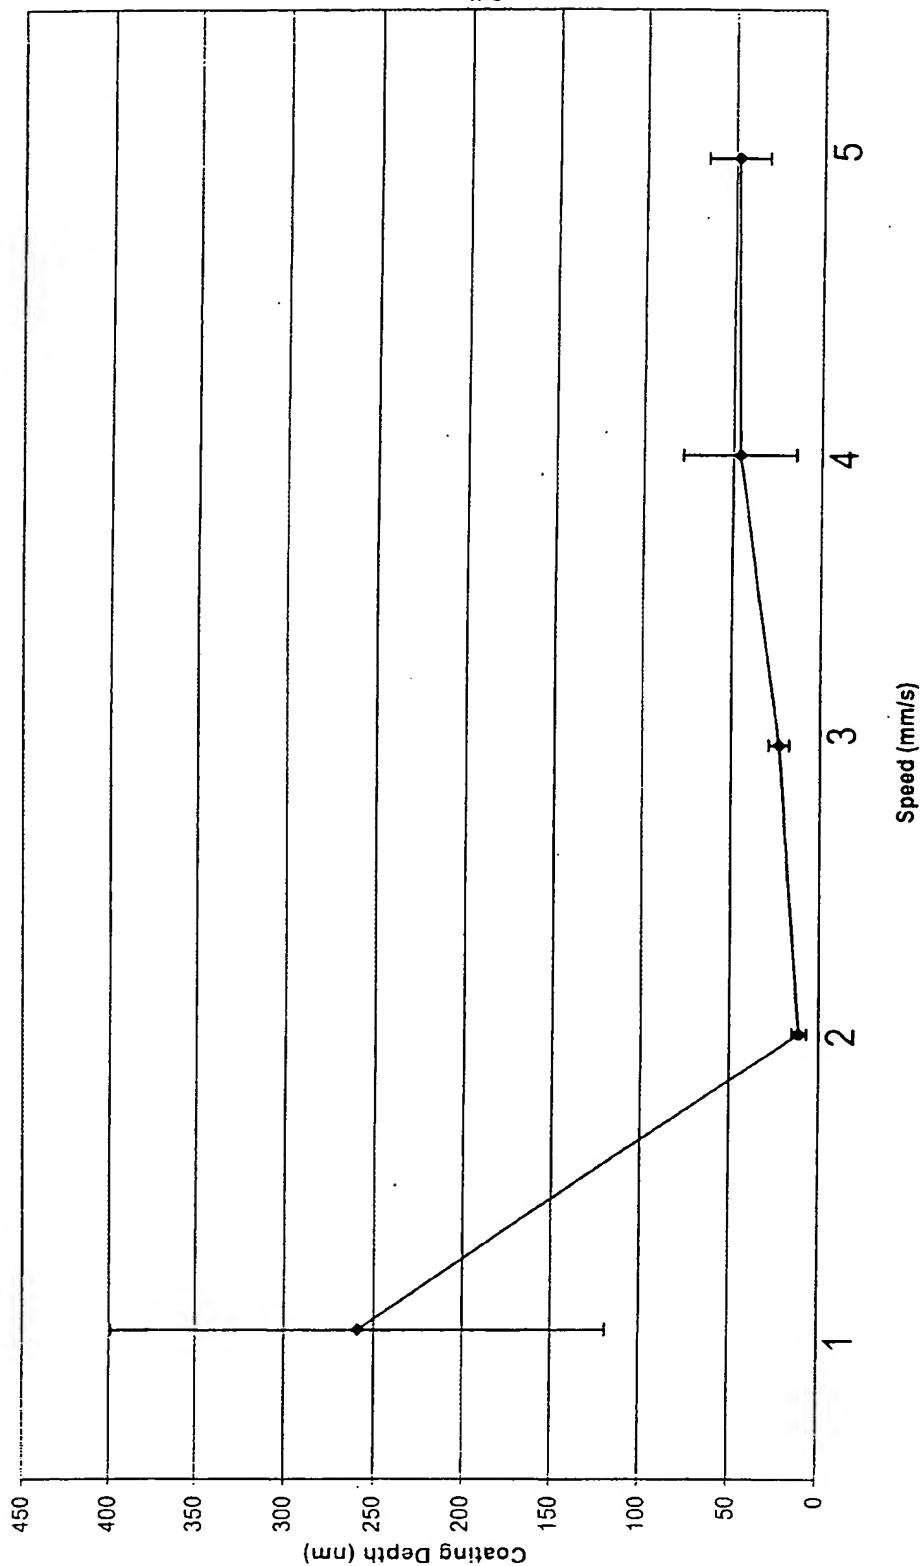

5/6

Figure 6


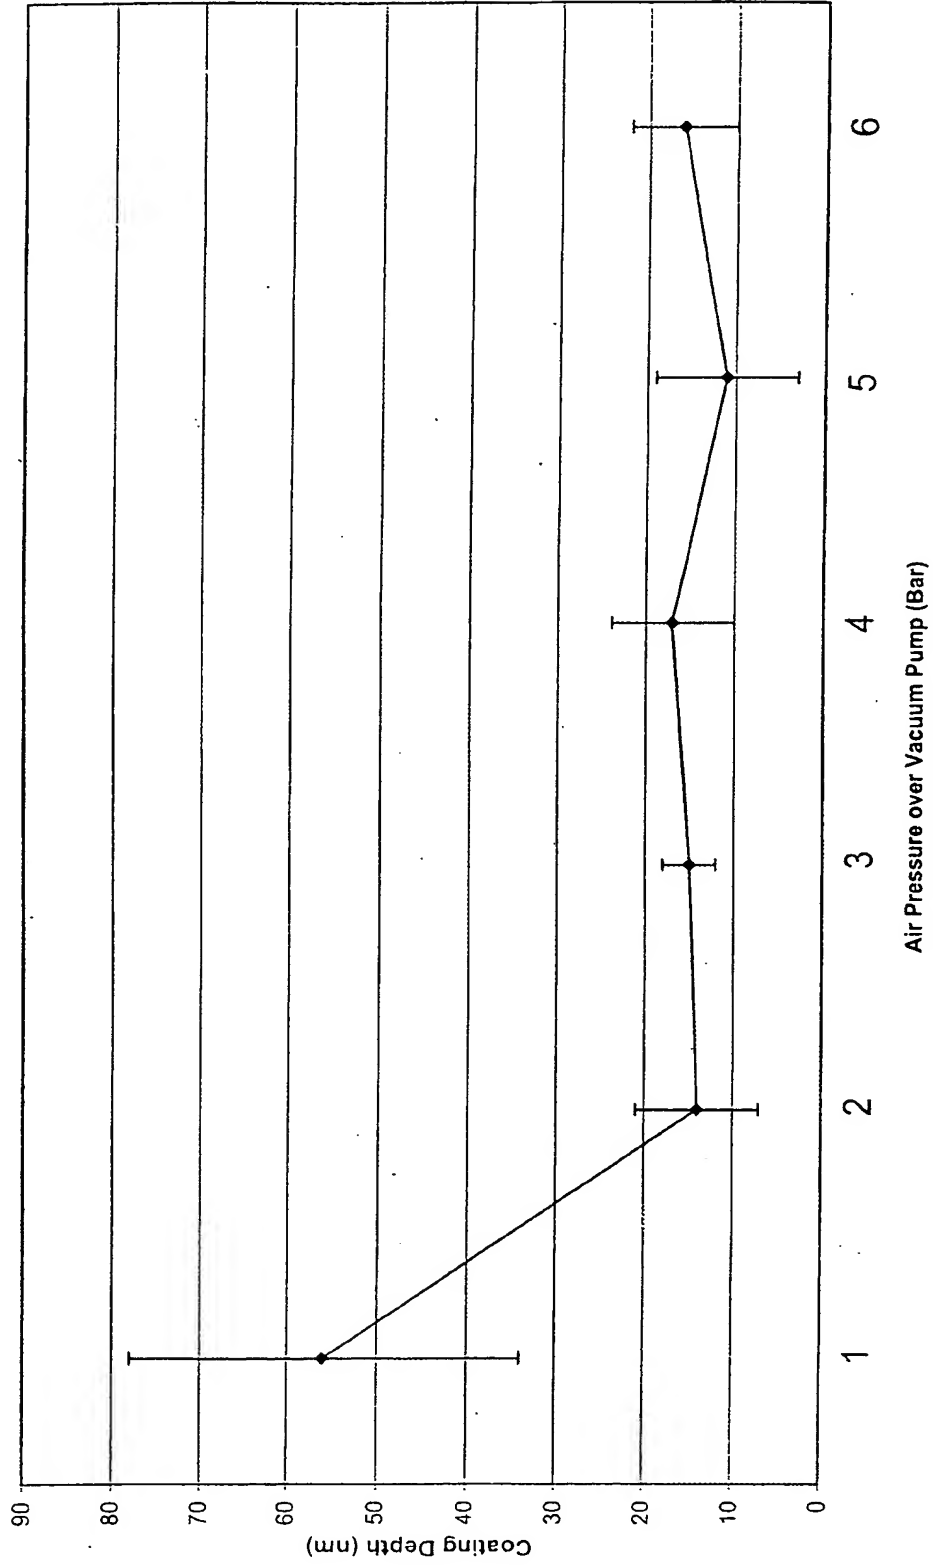


Figure 7

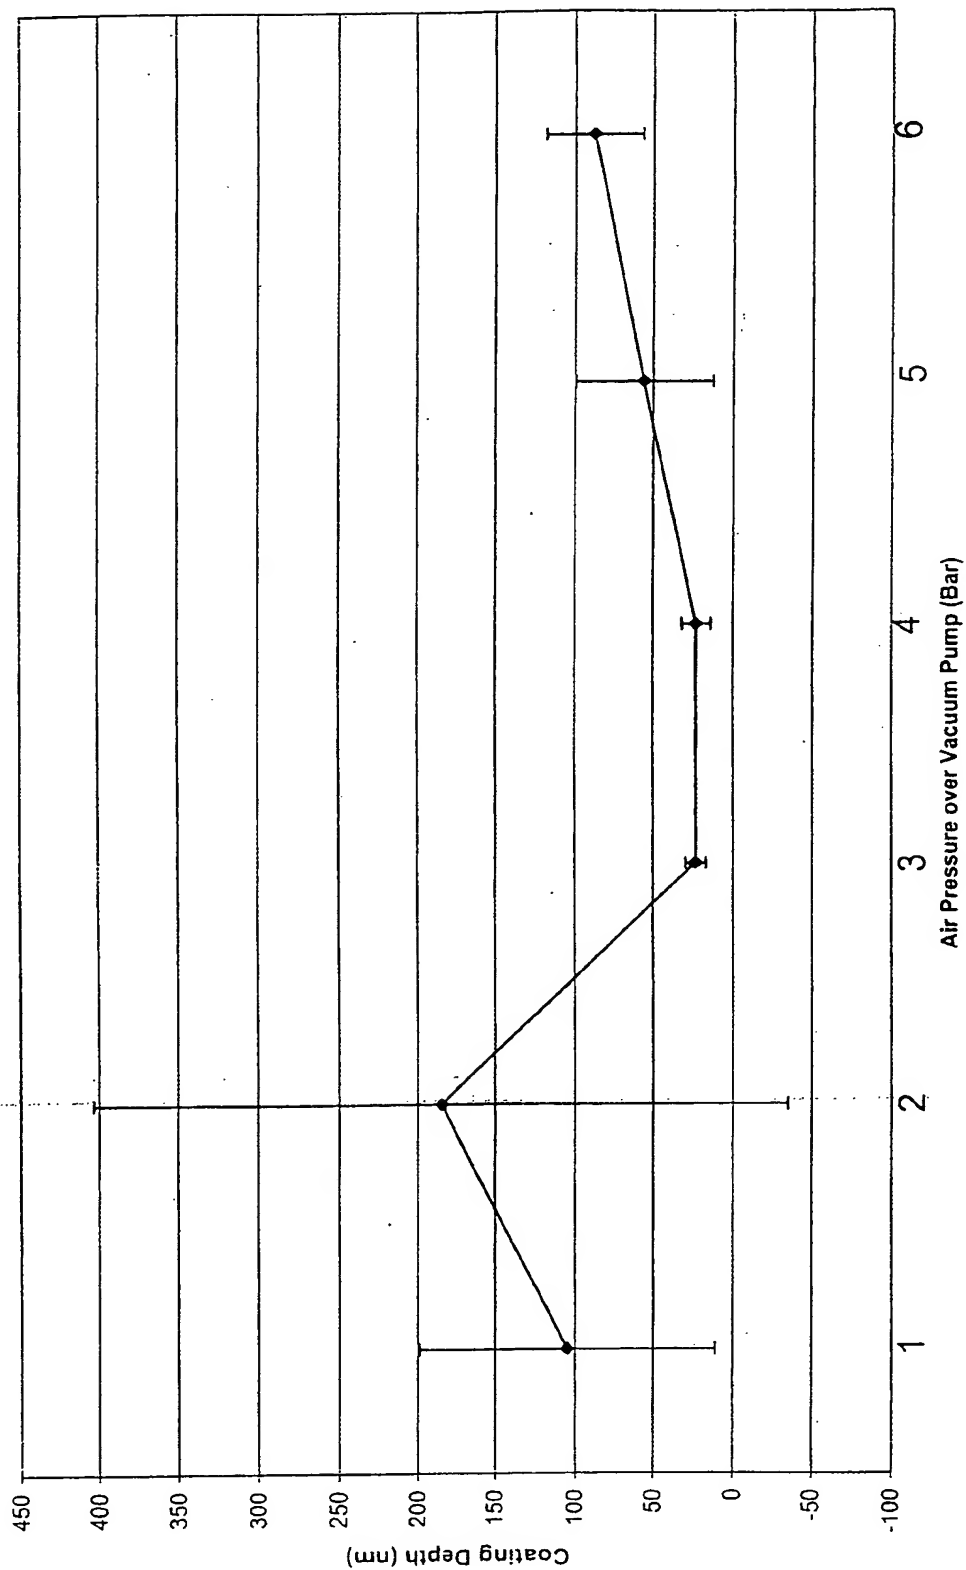

INTERNATIONAL SEARCH REPORT

Inter. Application No
PC1/GB 99/02370

A. CLASSIFICATION OF SUBJECT MATTER

IPC 7 B05C3/09 B05C9/12 B05D7/22 B05D1/18 A61F2/06

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 B05C B05D A61F

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X A	FR 2 696 527 A (AEROSPATIALE) 8 April 1994 (1994-04-08) page 9, line 15 -page 11, line 14; figures 1-3	1, 2, 5, 6, 11 3, 7, 9, 12, 14
A	US 5 713 949 A (JAYARAMAN) 3 February 1998 (1998-02-03) abstract; figures 15, 19, 20	1, 11
A	EP 0 562 752 A (XEROX) 29 September 1993 (1993-09-29) abstract; figure 1	1, 11
A	DE 38 07 545 A (GABBE) 21 September 1989 (1989-09-21) the whole document	1, 11
	-/--	

☒ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier document but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

"&" document member of the same patent family

Date of the actual completion of the international search

17 November 1999

Date of mailing of the international search report

25/11/1999

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 851 epo nl,
Fax: (+31-70) 340-3016

Authorized officer

Guastavino, L

INTERNATIONAL SEARCH REPORT

Interr
plication No
PCT/GB 99/02370

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT		
Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 4 073 978 A (WOMACK ET AL.) 14 February 1978 (1978-02-14) abstract; figures 1,3 -----	8,13
A	EP 0 334 567 A (ETHICON) 27 September 1989 (1989-09-27) abstract; figure 2 -----	1,11

INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/GB 99/02370

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
FR 2696527	A	08-04-1994	NONE	
US 5713949	A	03-02-1998	AU 2728097 A CA 2250954 A US 5895407 A WO 9737617 A US 5922393 A	29-10-1997 16-10-1997 20-04-1999 16-10-1997 13-07-1999
EP 562752	A	29-09-1993	US 5460859 A DE 69303089 D DE 69303089 T JP 6007735 A	24-10-1995 18-07-1996 28-11-1996 18-01-1994
DE 3807545	A	21-09-1989	NONE	
US 4073978	A	14-02-1978	NONE	
EP 334567	A	27-09-1989	AU 3159489 A JP 2232058 A	21-09-1989 14-09-1990

**This Page is Inserted by IFW Indexing and Scanning
Operations and is not part of the Official Record**

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ BLACK BORDERS
- ☒ IMAGE CUT OFF AT TOP, BOTTOM OR SIDES
- ☐ FADED TEXT OR DRAWING
- ☐ BLURRED OR ILLEGIBLE TEXT OR DRAWING
- ☐ SKEWED/SLANTED IMAGES
- ☐ COLOR OR BLACK AND WHITE PHOTOGRAPHS
- ☐ GRAY SCALE DOCUMENTS
- ☐ LINES OR MARKS ON ORIGINAL DOCUMENT
- ☐ REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY
- ☐ OTHER: _____

IMAGES ARE BEST AVAILABLE COPY.

As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.